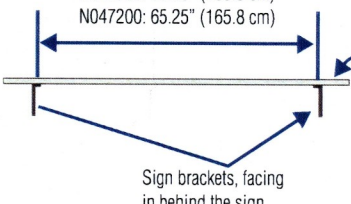
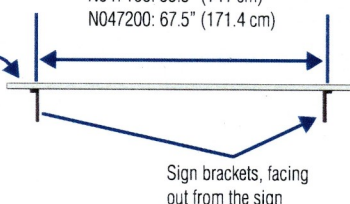






Alpha 7000 series NEMA 4 and 4x models	
Model (weight)	Mounting instructions
<p>N047120C (60 lbs, 27.2 kg)</p> <p>N047160C (70 lbs, 31.8 kg)</p> <p>N047200C (80 lbs, 36.3 kg)</p>	<p>1. Attach the two sign brackets to a wall, ceiling, or other surface. Be sure to place the brackets so the bracket flanges face appropriately as shown below. Mount the brackets the following distance apart (measured from the center of the mounting holes in each bracket):</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p><i>Mounted so flanges are hidden behind the sign</i></p> <p>N047120: 41.25" (104.8 cm) N047160: 53.25" (135.3 cm) N047200: 65.25" (165.8 cm)</p>  <p>Sign brackets, facing in behind the sign</p> </div> <div style="text-align: center;"> <p><i>Mounted so flanges show on the sides of the sign</i></p> <p>N047120: 43.5" (110.5 cm) N047160: 55.5" (141 cm) N047200: 67.5" (171.4 cm)</p>  <p>Sign brackets, facing out from the sign</p> </div> </div> <p style="text-align: center;">Wall or ceiling</p> <p>NOTE: Do <i>not</i> install the sign directly to drywall or plasterboard. The sign must be fastened to a surface capable of supporting at least four times the weight of the sign.</p> <p>2. Mount the sign on the sign brackets using the two large hex bolts supplied.</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p><u>End view</u> wall-mounted</p>  <p>Hex bolt</p> <p>Wall</p> </div> <div style="text-align: center;"> <p><u>End view</u> ceiling-mounted</p>  <p>Hex bolt</p> <p>Ceiling</p> </div> </div> <p>3. Tilt the sign to select a viewing angle. To hold the sign in place, screw a Phillips screw (supplied) through one of the small holes on each bracket into the screw hole in the sign case.</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p><u>End view</u> wall-mounted</p>  <p>Phillips screw</p> <p>Wall</p> </div> <div style="text-align: center;"> <p><u>End view</u> ceiling-mounted</p>  <p>Phillips screw</p> <p>Ceiling</p> </div> </div> <p>NOTE: Keep a minimum 1.0-inch (2.54 cm) clearance on all sides of the sign for adequate ventilation.</p>