

NASDAQ				
	Last	Net Chg	% Chg	Volume
BROCADE COMMS	199.50	+17.00	+9.32	259700
PHONE.COM INC	145.00	+12.25	+9.23	568600
HARMONIC INC	127.75	+10.67	+9.12	261000
COPPER MTN NET	109.56	+9.46	+9.46	580500
YAHOO INC	150.34	+8.78	+6.20	3112700
EMULEX NEW	79.62	+7.62	+10.59	202200
ARIBA INC	139.00	+8.00	+6.11	128900
SIEBEL SYSTEMS	74.81	+6.31	+9.22	724600
REDBACK NETWRKS	115.00	+6.50	+5.99	1534400
GLOBESPAN INC	75.75	+6.25	+8.99	71300

## InfoTracker™

The InfoTracker from Adaptive Micro Systems is a dynamic tri-color, character-based, multiple line information display. At-a-glance, traders are kept aware of market movement and have instant access to real-time, critical data.

The networkable, modular design of the InfoTracker allows it to be customized in any configuration of 2 lines x 8 characters. Utilizing the right PC software, users are able to arrange information exactly the way they want to see it, in a WYSIWYG environment. Traders now have the ability to display quotes, news, in-house messages, buy/sell data, world clock zones, or any information being presented on a terminal.



### Standard Features

- Modular design
- 1.4", 2.1" character heights
- Excellent angle viewing
- Tricolor (red, green, amber)
- Simple, quick installation
- Front serviceable
- Easy networking (RS485 or LAN)
- In house or third party software

# ALPHAVISION InfoTracker Specifications


	1.4" Characters	2.1" Characters
Characters Per Row:	16 to 168, increments of 8*	16 to 112, increments of 8*
Rows of Characters:	6 to 30, increments of 2*	6 to 20, increments of 2*
Width Per Character: (includes space between characters)	1.22" (3.0cm)	1.82" (4.6cm)
Height Per Row(includes space between rows):	2.21" (5.6cm)	3.3" (8.3cm)
Weight Per Character(Approximate):	4.5 oz (.11Kg)	5 oz (.14Kg)
Enclosure Height Adder:	5.25" (13.3cm)	6" (15.3cm)
Enclosure Width Adder:	5.5" (14cm)	6" (15.3cm)
Enclosure Depth:	4.75" (12.1cm)	4.75" (12.1cm)
Power Per Character (approx.):	16 watts max.	16 watts max.

\*Contact Adaptive for additional product sizes and character heights.

Pixel Size (Diameter):	0.2" (.05 cm)
Pixel (LED) Color:	Each dot can be red, green, or amber
Center-to-Center Pixel Spacing (Pitch):	0.3" (0.8 cm)
Character Size:	1.4" or 2.1"
Memory Capacity:	64 kb
Serial Computer Interface:	RS485 – Single RJ11 input jack –Optional Ethernet Interface
Power Cord Length:	9'10" (3meters)100V – 8'2" (2.5meters) 240V
Case Material:	Aluminum
Limited Warranty:	One-year parts

Agency Approvals:	<ul style="list-style-type: none"> <li>– 120 VAC Model: Listed to ANSI/UL 1950-3rd Edition (US) and CAN/CSA-22.2 No.950-M89 (Canada)</li> <li>– 240 VAC Models: Complies with EN 60950:1992 (Europe) and AS/NZS 3260-1993 (Australia/New Zealand)</li> <li>– FCC Part 15 Class A</li> <li>– CE Marked</li> </ul>
Operating Temperature:	32° to 120°F, 0° to 49°C
Humidity Range:	0% to 95% non-condensing
Mounting:	Wall mount only
Enclosure:	Fully front serviceable, aluminum

ALPHAVISION InfoTracker

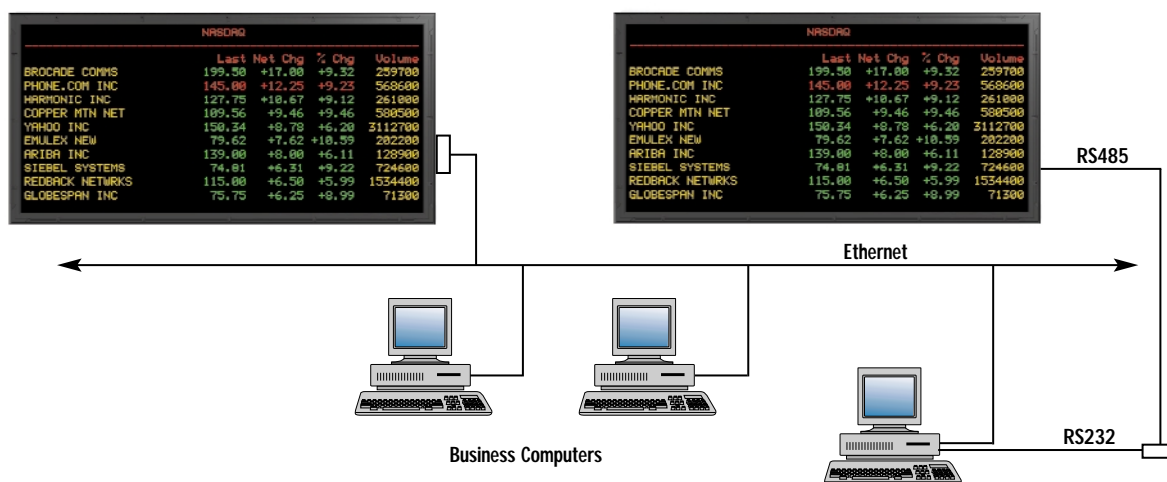

PC with Windows NT and interface software

Data from:

- Reuters
- Dow Jones
- Bridge
- PC Quote
- S&P's Comstock
- Etc.